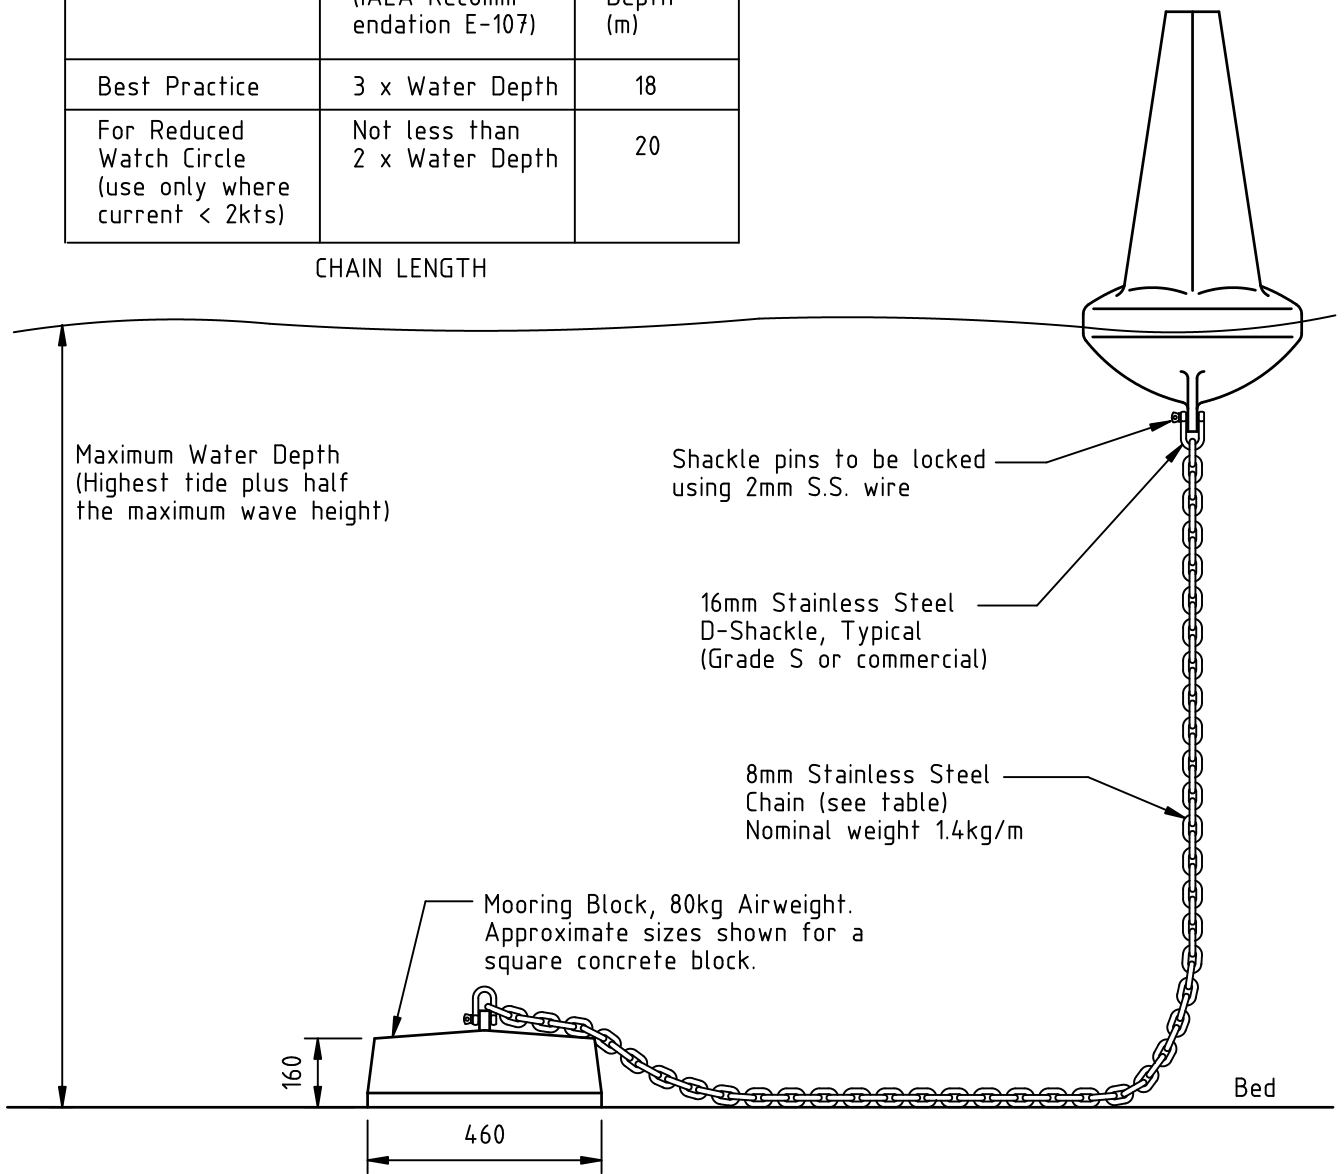


Rev No.	Description	Date:-	Drawn by:-	Checked by:-
-	-	-	G.Percy	J.Procter

	Recommended Length of Chain (IALA Recommendation E-107)	Maximum Water Depth (m)
Best Practice	3 x Water Depth	18
For Reduced Watch Circle (use only where current < 2kts)	Not less than 2 x Water Depth	20

CHAIN LENGTH





NOTES:-

- 1/ Shackles and chain can be non-rated commercial products.
- 2/ Total weight of buoy equipment plus wet weight of the mooring line should not exceed 26Kg.
- 3/ The buoy can be moored using braid rope where service conditions allow. Attach rope to the buoy using a tail chain of 12mm S.S., length to suit buoy loading:-

	Minimum Tail Chain (12mm)	
	Length (m)	Airweight with shackle (kg)
Buoy only	1	3
with SL15	2	5.7
with SL60	3	8.4

General Note
 Recommendations given herein are advisory only. As each buoy installation varies, the buoy operator should establish fitness for purpose prior to installation.

 Sealite	Part No:-		MOORING OF SLB600, MK2		
	Filename:- slb600_mk2_mooring.dxf	Revision:- N/A	Projection 	Scale:- NTS	Sheet 1 of 1
Drawn by:- G.Percy		Checked by (& date):- P.Bird 17/05/2010		Approved by (& date):- C.Procter 17/05/2010	
Date:- 17/05/2010					