

SL23-BK


LED Sectored Bridge Lights



Sectored bridge light

Typical Night Marking of Bridge Structures Generally Include:-

- Red or green flashing lights to mark the navigable limits of the channel in accordance with the IALA Maritime Buoyage System located on the bridge piers, under the span, or on buoy and beacons in the water.
- A 'best point of passage' indicated by a white light(s) located under the span and exhibiting a safe water mark character.



Partitioning of the Sealite LED reflector allows the lanterns to meet regulatory requirements.

SL23-BK Solar Bridge Lighting Kit

Sealite's SL23-BK is an LED Sectored Bridge Lighting Kit specifically designed to clearly mark bridges and structures extending over navigable waterways, and is used extensively throughout the USA.


The SL23-BK features a large SL23 solar power supply (10watt solar module with 7.5Ah SLA battery), positioned at the top of the assembly to maximise solar collection.

The sectored lantern is fixed on as standard, but available with a range of other factory-set flash characteristics and sectoring requirements to suit local regulations.

The optional long extension arm between the light and the power supply ensures clear visibility of the AtoN from mariners below.

PLEASE NOTE: the extension arm is not included with the standard SL23-BK bridge lighting kit. Sealite can manufacture a range of extension arms to suit many installations - please contact your Sealite representative today for details.

Large 10watt solar module & 7.5Ah battery

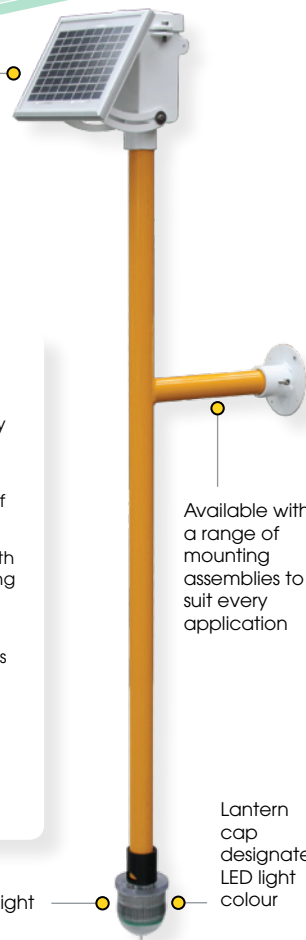

Available with a range of mounting assemblies to suit every application

Lantern cap designates LED light colour

Sectored light

Sealite have a range of other marine lanterns that may also be used to comply with bridge lighting requirements.

The 107mm Sealite LED lens is available in both positive and negative divergence to cater for elevated mounting positions.

Bridge lights are typically fixed-on, however a choice of over 256 IALA recommended flash patterns are available as standard.

The lights are available as configured to operate from 12v, 110v, or 240v power, or supplied as complete solar/battery systems to comply with requirements of regional governing bodies such as the U.S. Coast Guard, or the IALA Recommendations for the marking of fixed bridges over navigable waters.

In U.S. waters for instance, the Coast Guard prescribes certain combinations of fixed lights for bridges and structures extending over waterways. In general, red lights are used to mark piers and supports, and green lights mark the centerline of the navigable channel through a fixed bridge.

If there is more than one channel through the bridge, the preferred route is marked by three white lights placed vertically. Red lights are also used on some lift bridges to indicate the lift closed, and green lights to indicate that the lift is open to vessel traffic.

Double-opening swing bridges are lighted with three lanterns on top of the span structure so that when viewed from an approaching vessel the swing span when closed will display three red lights, and when open for navigation will display two green lights.



Contact your local authority for a full description of bridge marking requirements for your region.

For a copy of the IALA Recommendations for the marking of fixed bridges over navigable waters please contact Sealite.



Head Office:
Sealite Pty Ltd
AUSTRALIA

Ph. +61 (0)3 5977 6128
Fax. +61 (0)3 5977 6124
Internet: www.sealite.com.au
Email: info@sealite.com.au

Sealite USA
USA (Gilford, NH)
Ph. (603) 524-6066

Fax. (603) 524-8100
Internet: www.sealiteusa.com
Email: info@sealiteusa.com